RM313

3U Open-Bay Server Chassis

Rear View

Inside View

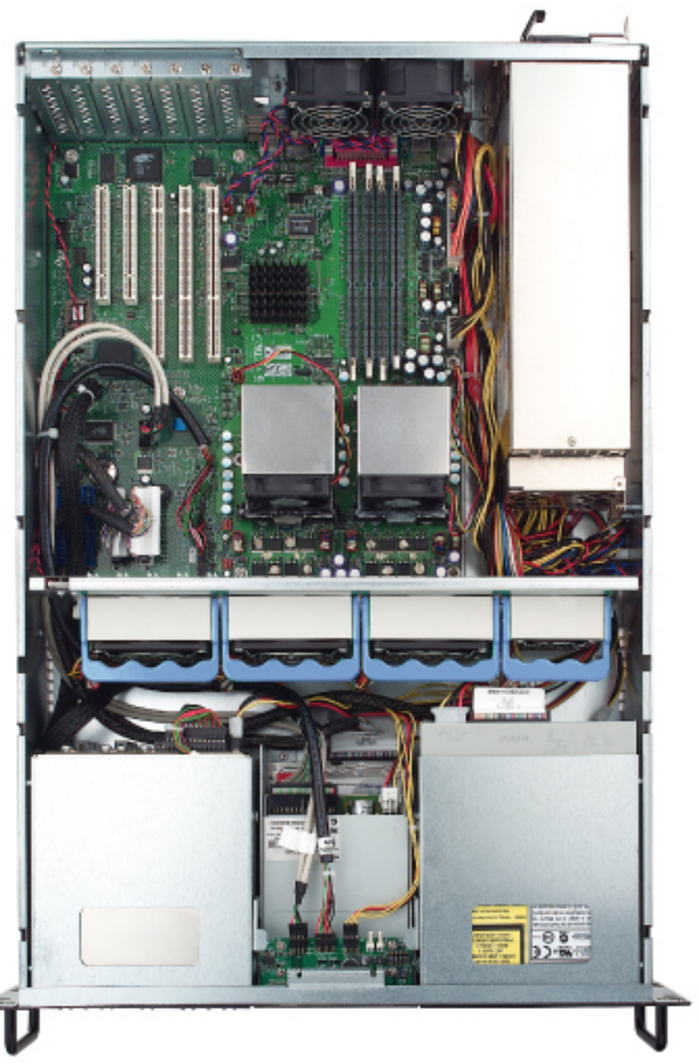

Front View

Features & Benefits

- Open bays for versatile storage configuration
- Utilized 5.25" & 3.5" bays with Chenbro storage kits
- Screwless drive bay for easy maintenance
- Tylersburg solution compliance

Specification

Model Name	• RM31300
M/B Form Factor	• Extended ATX (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D×W×H)	• 660 mm × 430 mm × 132 mm • 26" × 16.9" × 5.2"
Drive Bay	• External : 5.25" x 6, 3.5" x 3
PSU	• Form Factor : Single, Redundant • Watt : 820 W
Indicator	• 1 x Power Status LED, 1 x HDD Activity LED, 2 x LAN Activity LEDs, 1 x Fan Failure & Overheat Warning
Front Control	• Power ON/OFF, Alarm Mute, System Reset, 2 x USB 2.0 Ports
System Security	• Intrusion Switch
Cooling Fan	• Front : N/A • Middle : 4 x 80 mm (T=32 mm) non hot-swap middle fans or 1 x 60 mm (T=25 mm) & 3 x 80 mm (T=32 mm) hot-swap middle fans • Rear : Optional 2 x 80 mm (T=25 mm) rear fans
Slot Opening	• 7
Metal Thickness	• 1.2 mm
Net Weight (Chassis only)	• 12.3 Kg
Gross Weight (w/Packing)	• 16.38 Kg
Backplane	• N/A
Rear Window	• Standard
Front Bezel	• Optional
Cubic Feet	• 5.22
Container Info. (Single Packing)	• 20' : 204 • 40' : 420 • 40'H : 473

6 x 5.25" bays for ODD or storage kits

3 x 3.5" bays for FDD or 3.5"/ 2.5" HDD with SK41203

Screwless locks for 5.25" bays

Screwless hot-swap fan

Enforcing 2 x rear 80 mm fans